
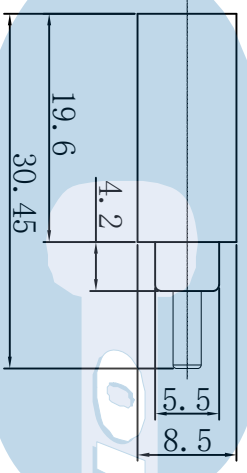


REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE

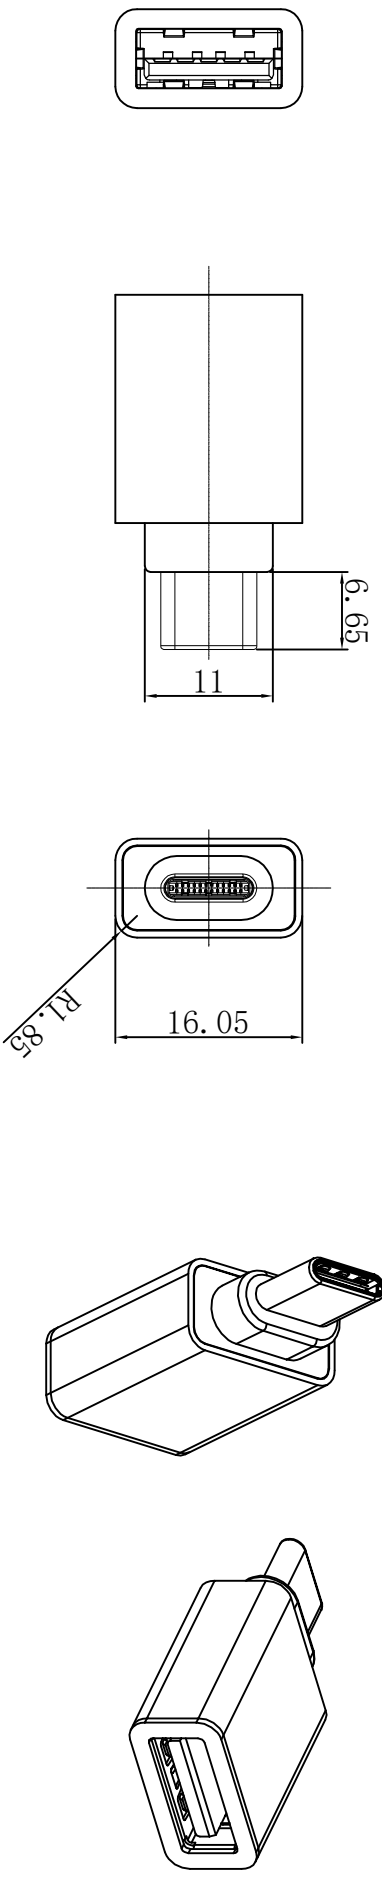

Test requirements:  
 A. 100% points test can't dislocation.  
 B. 100% test conduction performance OK  
 (not short circuit, open circuit!).

PIN ASSIGNMENT

USB Type-C Plug #1		USB Type-C Plug #2	
PIN	Signal name	PIN	Signal name
A1, B1, A12, B12	GND	4, 7	GND_DRAIN
A4, B4, A9, B9	VBUS	1	VBUS
A5	CC		
B5	Vconn		
A6	Dp1	3	D+
A7	Dn1	2	D-
A2	SSTXp1	9	SSTX+
A3	SSTXn1	8	SSTX-
B11	SSRXp1	6	SSRX+
B10	SSRXn1	5	SSRX-
SHELL	Shield	SHELL	Shield

⑤	IPC	Al Shell CNC Machining or Plastic shell, oxidation treatment
④	A/R	PVC 50P-R0
③	IPC	USB3.1 A/F Blue
②	IPC	Type-C Plug GOLD 30U"
①	IPC	USB3.1 PCB FOR USB AF 3.0 SMT TYPE

TITLE  
 USB3.1 CM TO USB3.0 AF  
 02 Adapter Assembly



UNITS	SCALE	REV.	SHEET	TITLE
mm	1:1	A0	1 OF 1	USB3.1 CM TO USB3.0 AF 02 Adapter Assembly
GENERAL TOLERANCE	DR.	DATE		
0. ±1.0	CHK.	16.02.22		
0.0 ±0.70	APPD.			
0.00 ±0.50				
0. ±3°				
0. ±2°				
MATL	FINISH	DWG.NO.	SIZE	
SEE TABLE	SEE TABLE	5585	A4	
SERIES				
A		P/N:585-5241		