

MINI USB SOCKET SIDE ENTRY SMT CON.



5622 SERIES. Mini USB Socket A and B Type.

General Features

- Standard mini Usb connector 5 pins A/B type
- Contact area: selective gold plating over nickel
- Solder area: tin plating over nickel
- With SMT fixing tab

Materials

- Insulator: LCP GF UL 94 V-0
- Contact: Brass t = 0.20 mm.
- Shell: stainless steel t = 0.40 mm. 40 μ" min. nickel over plated
- Operating temperature. -25°C to +85°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: < 30 V
- Current rating: 1.0 A
- Contact resistance: < 30 mΩ
- Dielectric withstanding Voltage: 100 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical Features

- Mating force: < 3.50 Kgf
- Unmating force: > 0.70 Kgf
- Durability: 5.000 Cycles

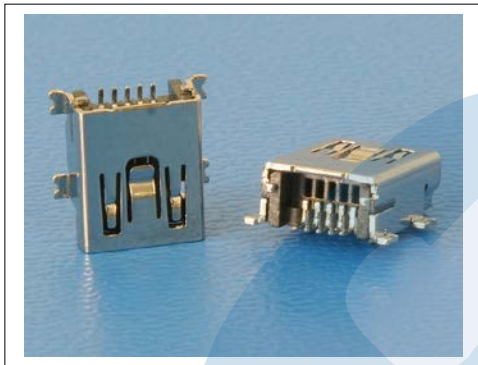

Part Number	Connector Type
5622 - 16051E	Type A
5622 - 16052E	Type B
5622 - 16053E	Type A/B

E = Packing Options

- E = 1. Tube
- E = 2. Reel+ Plastic Cover

